

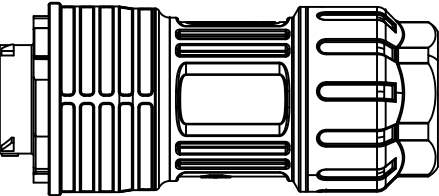

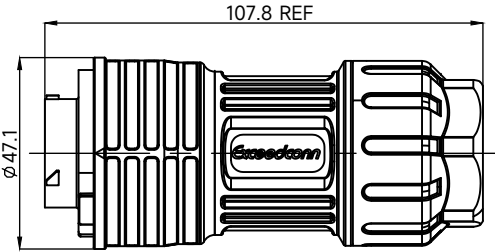


2301512002_AC Connector(5C,40A,female)

RoHS

CHANGE NO.	CHANGE CONTENTS	REV.	NAME/DATE



Notes:
Electric testing:
1. Rated Voltage:600V;
2. Rated Current:40A;
3. Contact Resistance:≤50mΩ;
4. Dielectric Withstanding Voltage:3000V
5. Insulation resistance: ≥500MΩ;
Mechanical property:
1. Mating Cycle: ≥500次;
2. Cable Gauge:2.5-10mm²
Environmental performance:
1. Protection class: IP67 1m-30min(After mating);
2. Operating Temperature: -40°C~105°C
Others:
1.Type No:EN200-2205-101

TOLERANCES UNLESS OTHERWISE SPECIFIED				MATERIAL		 APsystems ALTERNATELY POWER	
X.	±3.00	X°	±3.00°				
.X	±2.00	.X°	±2.00°			NAME AC Connector (5C,40A,female)	
.XX	±1.00	.XX°	±.00°				
.XXX	±0.50	.XXX°	±0.50°				
DWN.				UNIT	mm		
CHK.				SHEET	OF		
					--	REV.	-